


TEHNI


PANTELOS GROUP OF COMPANIES

The door specialists

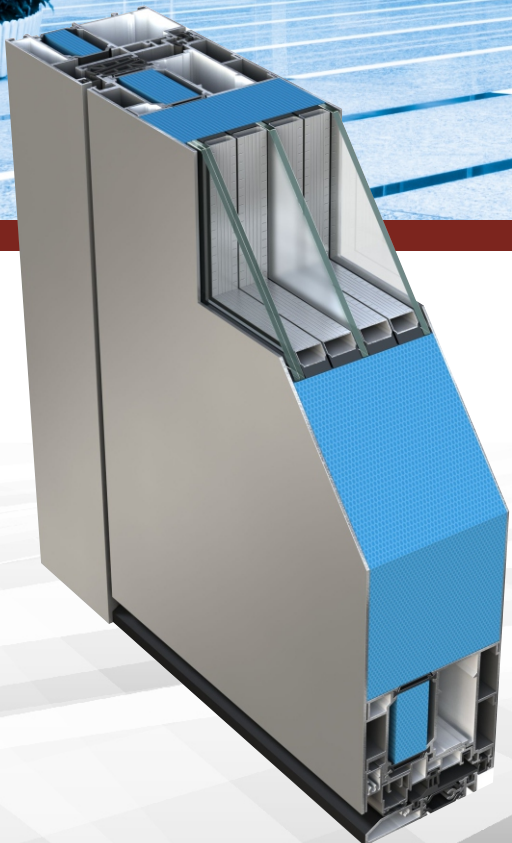

SUPERIOR Platinum Door System

Available Frames

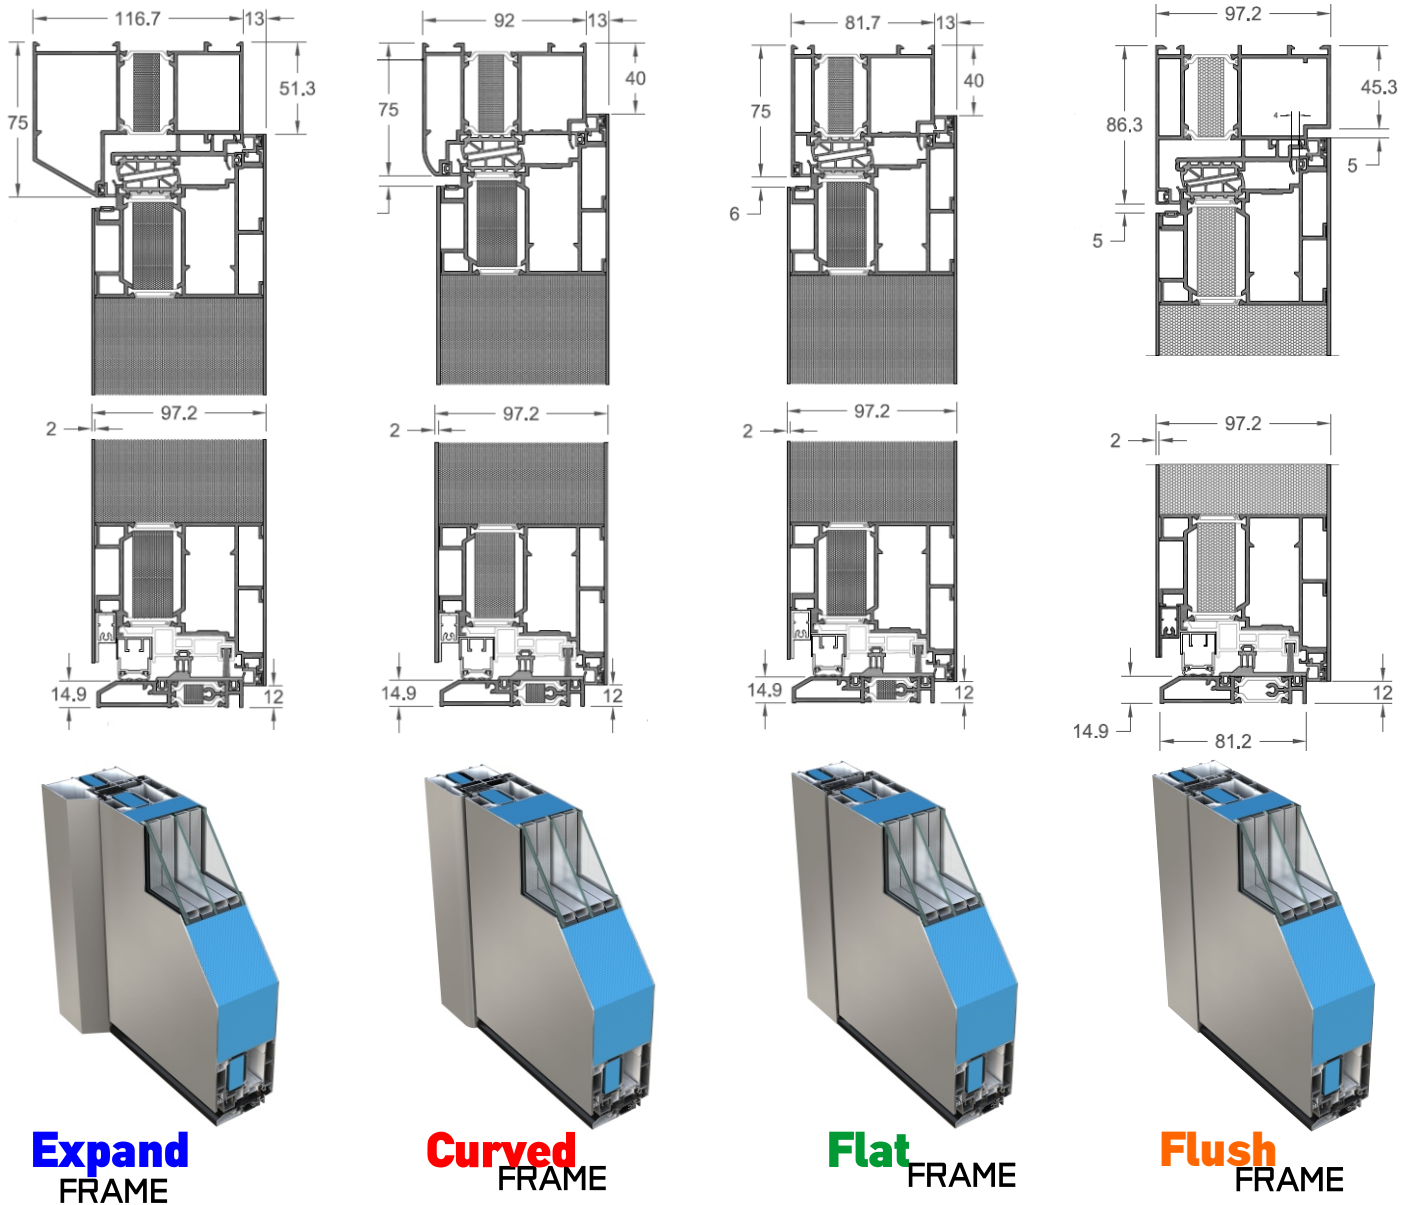

Certifications

Thermal
Transmission
Coefficient



$U_D = 0,88$ W/(m²K)

Burglar
Resistance



RC 2



Air permeability according to EN 12207:2016-12



Class: 3

Resistance to wind load according to EN 12210:2016-03



Class: C4/B4

Watertightness according to EN 12208:1999-11



Class: 3A

Superior Platinum Door Specifications

Profile dimensions (Frame + Sash)	95 mm (Flat) - 105 mm (Curved) - 130 mm (Expand) 97,2 (Flush)	Minimum door height	1920 mm
Internal aluminium sheet thickness	2,0 mm	Minimum door width	960 mm
External aluminium sheet thickness	2,0 mm	Maximum door height	2250 mm
CNC design internally	YES	Maximum door width	1250 mm
INOX decoratives flush with the door	YES	Main Door Glass	Triple / Triplex 3+3 4 4 mm
Door Panel thickness	97,2 mm	Sidelight or Skylight Glass	Triple / Triplex 3+3 4 4 mm

SUPERIOR Platinum

Standard Configuration

Three points Hook lock
WINK HAUS

**WINK
HAUS**

Triple glass

Triplex (3+3) secure, externally
Sandblasted, middle glass

Three heavy duty
hinges
3/D adjustable

Air stopper on
threshold

Security Cylinder
with 5 keys and card

Cylinder
Ring

Internal
Handle

RAL Mat colors without extra charge :

White



3004



7001



7016



8017



9006



9007



7016



Structura

TEHNI
PANTELOS GROUP OF COMPANIES